

Dual Port Isolation Valves

½" | ¾" | 1" | 1¼" | 1½" | 2" | 2½" | 3"

- In-line serviceable
- Locking handle and collar
- Dual gauge/purge ports
- CRN Registered



Specifications

Class 1 Series 7200 Isolation Valves shall be quarter-turn on-off ball type, cleaned for oxygen service, factory pressure tested, in-line serviceable and rated for 600 PSI.

The Series 7200 Isolation valves shall be complete with a bronze body, lever handle, chrome-plated bronze ball, teflon seals and seats, type K copper tubing extensions complete with two brass 1/8 FNPT ports, one on each side of the valve, to facilitate installation and purging. Valves to be complete with locking collar suitable for locking valve in either the open or closed position. Valves to be factory capped and packaged for cleanliness.


Dual Port Isolation Valves

1/2" | 3/4" | 1" | 1 1/4" | 1 1/2" | 2" | 2 1/2" | 3"

Note: Gauge port supplied w/ 1/8" NPT Plug



Gauge Port Design

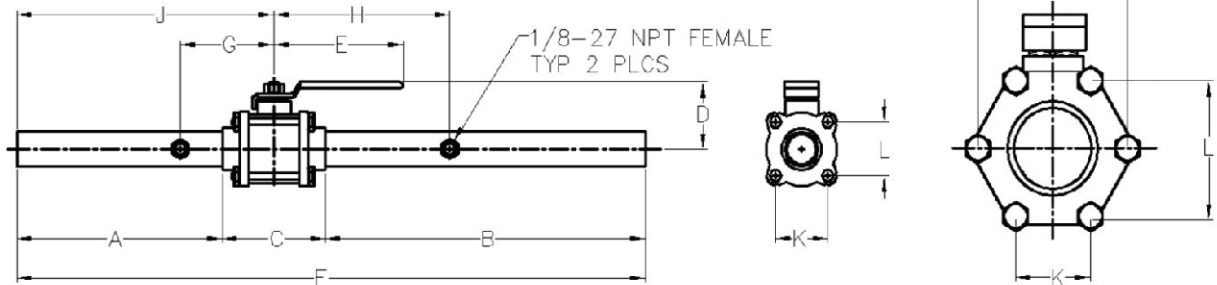

Six Bolt used on 2 1/2 & 3" Valves

Dimensions

Pipe Size mm (")	A	B	C	D	E	F	G	H	J	K	L	M
13 (1/2)	6.56	11.82	2.62	1.69	3.35	21.00	2.38	6.37	7.87	1.31	.93	-
19 (3/4)	6.78	11.28	2.93	1.89	4.33	21.00	2.69	6.06	8.25	1.43	1.43	-
25 (1)	6.86	10.70	3.44	2.05	4.33	21.00	2.88	5.87	8.58	1.62	1.62	-
32 (1 1/4)	6.77	10.27	3.96	2.56	5.12	21.00	3.25	5.50	8.75	2.00	2.00	-
38 (1 1/2)	6.65	9.92	4.43	2.72	5.12	21.00	3.38	5.37	8.87	2.25	2.25	-
51 (2)	8.09	7.35	5.55	3.15	6.30	21.00	3.75	5.00	10.87	2.81	2.81	-
64 (2 1/2)	12.64	12.64	6.73	4.29	9.06	32.00	4.25	4.25	16.00	2.50	4.33	5.00
76 (3)	12.22	12.22	7.56	4.61	9.06	32.00	4.50	4.50	16.00	2.75	4.73	5.00

Order Information

Model No.	Pipe Size (Inches)	Pipe Size (mm)
7300-2002	1/2	13
7300-2003	3/4	20
7300-2004	1	25
7300-2005	1 1/4	32
7300-2006	1 1/2	40
7300-2007	2	50
7300-2008	2 1/2	65
7300-2009	3	75