



In-Line Check Valves

Features

- ✓ Bubble-tight shut-off
- ✓ Cleaned for Oxygen Service
- ✓ CRN Registered
- ✓ Type K copper extensions
- ✓ Dual Gauge Ports
- ✓ Field removable body for service





Specifications

Class 1 CVE Series in-line bubble-tight, soft-seat check valves complete with 3 piece bronze body, Type K copper extensions, stainless steel spring, and EPDM seat.

Check valves shall be CRN registered, 300 PSI*, factory cleaned for oxygen service and packaged for cleanliness.

*240PSI for 4" valve

High Flow Body Design

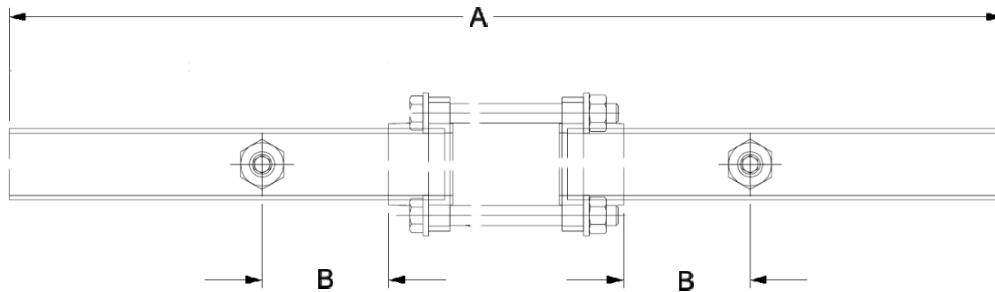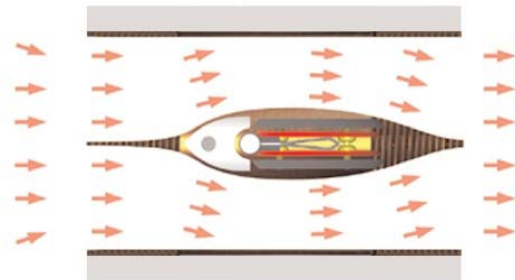

Ordering & Dimensional Information

SIZE INCH (mm)	1/2 (13)	3/4 (19)	1 (25)	1 1/4 (32)	1 1/2 (38)	2 (50)	2 1/2 (64)	3 (75)	4 (100)
MODEL	CVE-050-O2	CVE-075-O2	CVE-100-O2	CVE-125-O2	CVE-150-O2	CVE-200-O2	CVE-250-O2	CVE-300-O2	CVE-400-O2
A INCH (mm)	15.12 (384)	15.21 (386)	15.72 (399)	16.00 (406)	16.45 (418)	17.18 (436)	18.10 (460)	18.76 (477)	20.56 (522)
B INCH (mm)	2.00 (51)	2.00 (51)	2.00 (51)	2.00 (51)	2.00 (51)	2.00 (51)	2.00 (51)	2.00 (51)	2.00 (51)