


ASME Pressure Relief Valves

70 PSI | 75 PSI | 125 PSI | 200 PSI | 300 PSI | 400 PSI | Custom

Features

- ✓ Bubble-tight Teflon seat
- ✓ Cleaned for Oxygen Service
- ✓ ASME Section VIII certified
- ✓ CRN Registered in all Provinces
- ✓ Conforms to CSA Z7396.1 and CSA B-51

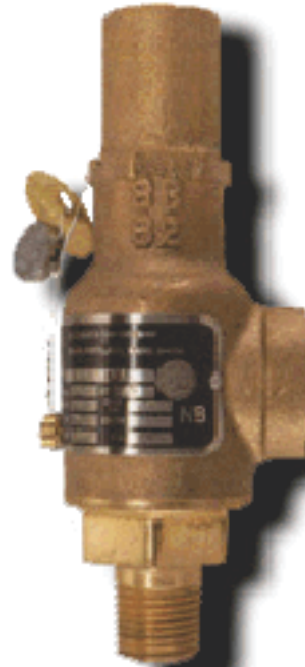

Specifications

Class 1 Inc. PRV Series heavy duty, high capacity, pressure relief valves, complete with Teflon seat, CRN registration and ASME certification.

Valves to have a bronze body with 1/2" MNPT inlet and 3/4" FNPT outlet.


Valves to be factory cleaned for oxygen service, and packaged for cleanliness.

Shell: Cast Bronze, A.S.M.E. SB-62

Base: Forged Brass, Alloy C37700

Trim: Copper Alloy

Spring: Stainless Steel 17-7 PH A.S.T.M. A-313, Type 631

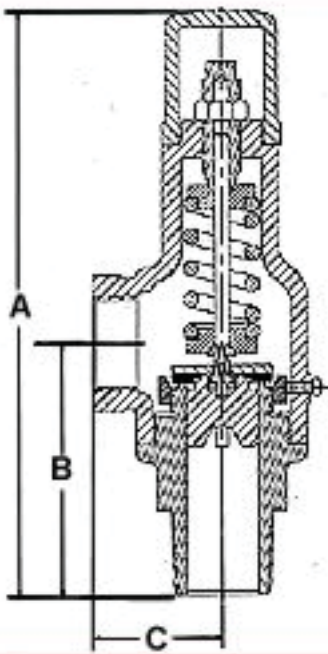

Inlet	Outlet	A	B	C	Weight	Max Psi
1/2	3/4	5-15/16	2-21/32	1-5/16	2 lbs.	max 400 psi

Ordering Information

Set Point	70 PSI	75 PSI	125 PSI	150 PSI	200 PSI	300 PSI	400 PSI
Model	PRV50-70-O2	PRV50-75-O2	PRV50-125-O2	PRV50-150-O2	PRV50-200-O2	PRV50-300-O2	PRV50-400-O2
Capacity (SCFM)	120	127	198	234	305	447	595